

SAFE ENTRY HANDLE



The SAFE ENTRY HANDLE is designed to be bolted on the flange of a pressure vessel such as a tower or drum, while the vessel is out of service for maintenance.

After the manway cover is removed, the SAFE ENTRY HANDLE is mounted on the manway using the proper size stud bolts for the flange.

Without the SAFE ENTRY HANDLE, workers have to try and grip the outer bolt ring of the flange, which is not designed to be used as a handle.

Inherent dangers from this can include:

- Hands slipping
- Falling
- Injured fingers
- Severe cuts from insulation

The SAFE ENTRY HANDLE helps to mitigate these hazards as well as providing a better angle for pulling, reducing strain on the back and shoulder muscles.

The SAFE ENTRY HANDLE fills another gap in safety programs that was previously not addressed.



The SAFE ENTRY HANDLE provides a secure handle to safely assist workers with entering and exiting a confined space.

CONTACT

Beaumont, TX

Andrew Wilson
President, Apex Trench and Mat
(409) 781-4152
awilson@immatsystem.com

Orain Tubbs
CEO, Apex Trench and Mat
(409) 444-7206
otubbs@immatsystem.com

Mike Martin
(409) 540-0358
mike.martin@dynamicmats.com

Kevin Johnson
(409) 673-1889
Kevin@apextrenchandmat.com

Houston and Sinton, TX

Tracy Hartman
(832) 776-0112
Tracy@hatservicesllc.com

Mike Tomsula
(713) 303-5608
Mike@hatservicesllc.com

Hadley L. Cohen
Hadley@apextrenchandmat.com
(409) 350-1538

Lake Charles, LA

Mike Martin
(409) 540-0358
mike.martin@dynamicmats.com


Hadley L. Cohen
Hadley@apextrenchandmat.com
(409) 350-1538

MADE IN THE USA

SAFE ENTRY HANDLE



Patent Pending

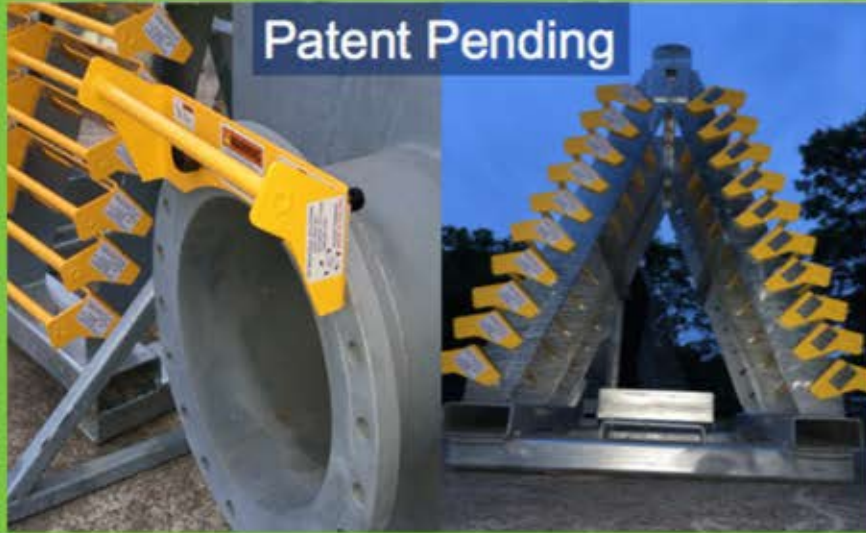

Specifications

Model number of handle / Flange size and rating

- Model -1: 18"-150# and 20"-150# flanges
- Model -2: 18"-300#, 20"-300# and 24"-150# flanges
- Model -3: 18"-600# and 20"-600# flanges
- Model -4: 18"-900# and 24"-600# flanges
- Model -5: 24"-300# flange
- Model -6: 18"-1500# flange
- Model -7: 20"-900# flange
- Model -8: 20"-1500# flange
- Model -9: 24"-900# flange
- Model -10: 24"-1500# flange

The handles should only be used with the specific size flanges listed next to each model number. The handles are designed to be used with the same size bolts that are required for the flanges. Using bolts smaller than the required size can result in the handle not being properly secured.

Proudly Made in the

